

GOVERNMENT OF KARNATAKA
(Dept. of Electrical Inspectorate)

No. EI/BS/DEI/BS2/ 2177 /2023-24

O/o. Electrical Inspector,
Bangalore South,
No: 95, 1st floor,
Gandhi Bazaar Road, Basavanagudi,
Bengaluru - 560 004.

To,
The Assistant Executive Engineer (Ele.)
BESCOM (O&M), Attibele Sub-division,
Bengaluru

Date: 14 JUN 2023

Sir,

Sub: Reconnection of Power supply for the electrical Installations.

Ref: 1) This Office Letter No. EI/BS/DEI/BS2/AEI/PI/Spot/2022-23, Dt: 05/06/2023

** ** ** *

With reference to above, it was requested you to disconnect the power supply to the following installation as they have not complied with Regulation 30 of Central Electricity Authority (Measures relating to safety and Electric Supply) Regulations, 2010. The consumer has submitted the compliance report for having attended the observations through licensed Electrical Contractor and also paid the inspection fees.

Hence the Power supply to the installation mentioned here under shall be reconnected.

Sl. No.	Name and address of installation	R.R. No.
1	M/s NVT Quality Education Trust, (ISME), Sy.No:88, Chembenahalli(V), Sarjapura Road, Dommasandra Post, Anekal(Tq), Bengaluru-562125	ATBHT-132

Yours faithfully,

Deputy Electrical Inspector
Bangalore South-2
Bangalore South-2
Bangalore

Copy to:

1. MC/OC.

Date: 10/06/2023

To
The Deputy Electrical Inspector
Office of the Electrical Inspector
Bangalore South -2
No.95, 1st floor, Gandhi Bazaar Main Road
Basavanagudi, Bengaluru -560 004.

From
M/s. NVT Quality Education Trust,
(ISME) Sy.No.88, Chembenahalli (V)
Sarjapur Road, Dommasandra Post,
Anekal Taluk, Bengaluru – 562 125.

Sir,

Sub:- Submission of compliance report for periodical inspection of 1x 315 KVA HT
1x140 KVA DG set, Lift -03 installation at the premises M/s. NVT Quality
Education Trust, (ISME) Sy.No.88, Chembenahalli (V) Sarjapur Road,
Dommasandra Post, Anekal Taluk, Bengaluru – 562 125.

Ref: Your office Letter No.EI-BS/DEI/BS2/AEI/PI/Spot /2022-23 .


In response to your observation letter referred above, we got the defects
rectified through licensed contractor M/s. J.M.J. Electricals and compliance report
is enclosed herewith for your kind perusal.

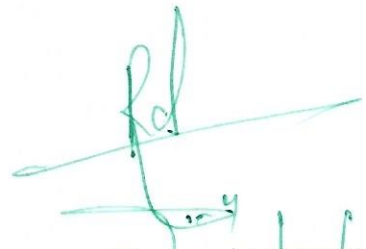
Periodical inspection fee of Rs. 10,300/- dated 04.04.2023 and Rs.7,400/-
dated 24.05.2023 paid to your office through online transaction and copy of the
receipt enclosed for your reference.

Hence we request to do the needful in the matter.

Thanking you,

Yours faithfully,
For NVT QUALITY EDUCATIONAL TRUST


Managing Trustee
(NITIN GARG)


Deputy Electrical Inspector
Bangalore South -2
Bangalore

Office Reconnection

J.M.J. ELECTRICALS

GOVT. LICENCED CLASS-I ELECTRICAL CONTRACTORS & ENGINEERS

We undertake all kinds of Electrical Works, Sales & Service of Electrical Appliances and Goods

2, N.T.I. Bus Stop, Bhoopasandra Main Road, Nagashetty Halli, Bangalore - 560 094.

Ref. :

Date : 10/06/2023

To
The Deputy Electrical Inspector
Office of the Electrical Inspector
Bangalore South -2
No.95, 1st floor, Gandhi Bazaar Main Road
Basavanagudi, Bengaluru -560 004.
Sir,

Sub:- Submission of compliance report for periodical inspection of 1x 315 KVA HT
1x140 KVA DG set, Lift -02 installation at the premises M/s. NVT Quality
Education Trust, (ISME) Sy.No.88, Chembenahalli (V) Sarjapur Road,
Dommasandra Post, Anekal Taluk, Bengaluru – 562 125.

Ref: Your office Letter No.EI-BS/DEI/BS2/AEI/PI/Spot /2022-23 .

With reference to the above subject, we are herewith submitting a compliance report for the defects attended by us vide above cited reference.

1. Furnished Transformer oil test results and megger results.
2. Furnished insulation test results of all electrical equipments and between conductors and earth of all LT circuits.
3. Painted the faded danger board and No admission board and refixed at a conspicuous location at the entrance of the substation, switchgear room, DG room & Lift room.
4. All electrical equipments distinctly labeled of permanent nature to identify the ratings including the operating voltages and current with HT/LT cable size and direction of power flow.
5. Maintained the earth pits. All the rusted funnel and bolt & nuts provided for the earth electrodes are replaced and earth electrode pits are reconstructed labeled.
6. Removed the vegetation in the yard and spreaded 40mm blue granite jelly over the substation yard and kept clean.
7. Provided cable with cable glands and the same earthed efficiently.
8. Replaced Silica gel in the breather and reactivated.
9. Furnished earth test results of all the electrode to the office.
10. Provided HT/LT cable route markers along the route of the cable and location of joints in the cable are identified.
11. All the outgoing LT circuits from the main LT panel distinctly labeled of permanent nature to distinguish the loads for which they control /feed at front and at the rear.
12. Covered open slots/holes in the LT switchgear panel and made vermin proof.
13. Provided medium voltage class rubber mat in front of the LT panel.

Ph. (O) : 080-23511049

Mob. : 94480 89943

91413 89943

J.M.J. ELECTRICALS

GOVT. LICENCED CLASS-I ELECTRICAL CONTRACTORS & ENGINEERS

We undertake all kinds of Electrical Works, Sales & Service of Electrical Appliances and Goods

2, N.T.I. Bus Stop, Bhoopasandra Main Road, Nagashetty Halli, Bangalore - 560 094.

Ref. :

/2/

Date :

14. Produced approval copy of H.T. Transformer, DG sets, Lift, Electrical installation of MSB to the office.
15. Furnished fresh calibration reports of the Relays, CTs, PTs provided for the HT beakers.

DG SET

16. Maintained and furnished monthly G forms furnishing details of units generated from individual DG sets and sold to your office and maintained F forms.
17. Furnished fresh calibration test certificate of the energy meter and CT provided for the DG sets.
18. Maintaining log book detailing /showing day-to -day generation of energy and fuel consumption
19. DG is using for own purpose.

LIFT


20. Furnished a copy of the Lift AMC agreement.
21. Lift license will be renewed within the due date.

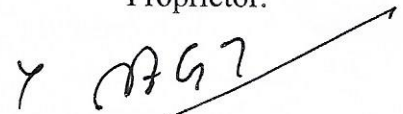
M.S Building

22. Replaced and regularized the DG set 1 x 62.5 KVA with 1x 140 KVA as per permission granted from your office. (copy enclosed)
23. We will take approval in future for LT load alteration /New Block from your department.

Thanking you,

Yours faithfully,
For JMJ Electricals


Proprietor.

Y 
Consumer